

ECU-Mill

SPECIAL OFFER for ECU-Mill-Uni-LV

SPECIAL OFFER – 60 % DISCOUNT

Offer valid with a minimum order of 3 pieces per item

- n General Purpose Program
- n Engineered for stability and flexibility
- n Cutting material and coatings specifically tailored to the material




Basic
LINE

P M K



ECU-Mill-Uni-LV

Duration: 15.05. - 30.09.2025

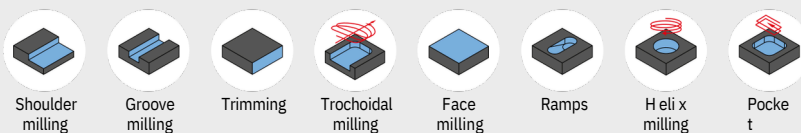

ECU-Mill-Uni-LV	Ø [mm]				Material suitability
	3 - 20	4	4	4	P 1 2 3 4 5 6 M 1 2 3 K 1 2 3



i Ordering conditions
Take advantage of this special offer – valid with a minimum order of 3 pieces per item number. Not combinable with other promotions.

=


- 60 %
SPECIAL
OFFER

Why choose MAPAL?



Product lines

- 1 Bore machining
- 2 Milling
- 3 Clamping
- 4 Setting | Measuring | Dispensing
- 5 Actuating



All from a single source

At MAPAL, customers can get everything they need from a single source and take advantage of our specialist knowledge of tooling and processing.



Partnership

The basis of everything we do at MAPAL is a close, open dialogue with all customers and, as a result, a long-term partnership on an equal footing.




Quality and precision

MAPAL tools stand for the highest level of quality and cost-effectiveness, characterized by excellent dimensional accuracy and the highest level of precision.



Standard range

The range of highly capable tools available from stock ensures excellent and reliable results for all machining tasks.



Technology leadership

In the machining of cubic components, MAPAL is the technology leader worldwide.



On the ground all over the world

Customer focus isn't just a buzzword at MAPAL – it forms an essential part of our corporate identity. On a global basis.

Distributed by:





Delivery conditions:

- Promotional details are subject to change without notice.
- Tools ordered via this promotion cannot be returned
- Normal payment terms apply
- This offer cannot be combined with other offers
- Only valid for orders in the same diameter

ECU-Mill-Uni-LV

Fresa a spallamento retto, versione corta
SCM780

Versione:
Diametro fresa: 3,00 - 20,00 mm
Materiale da taglio: HP921
Numero di taglienti: 4
Angolo dell'elica: 36°/38,5°
Particolarità: passo differenziato

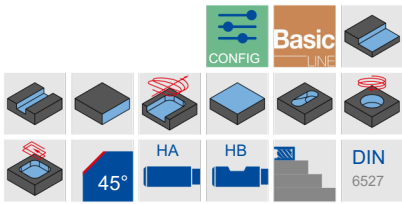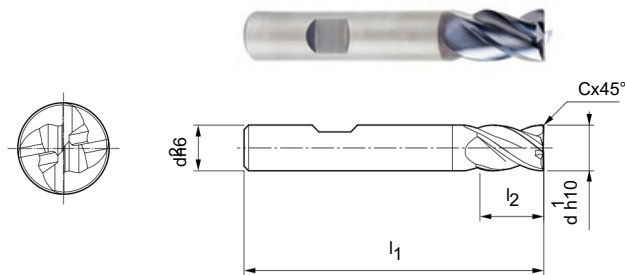

Serie selezionata per il magazzino

Dimensioni					z	Specifiche	Codice
d1 h10	d2 h6	l1	l2	Cx45°			
3,00	6	50	6	0,06	4	SCM780-0300Z04R-F0006HB-HP921	30656944
4,00	6	54	8	0,08	4	SCM780-0400Z04R-F0008HB-HP921	30656945
5,00	6	54	9	0,10	4	SCM780-0500Z04R-F0010HB-HP921	30656946
6,00	6	54	10	0,12	4	SCM780-0600Z04R-F0012HB-HP921	30656947
8,00	8	58	12	0,16	4	SCM780-0800Z04R-F0016HB-HP921	30656949
10,00	10	66	14	0,20	4	SCM780-1000Z04R-F0020HB-HP921	30656950
12,00	12	73	16	0,24	4	SCM780-1200Z04R-F0024HB-HP921	30656951
16,00	16	82	22	0,32	4	SCM780-1600Z04R-F0032HB-HP921	30656953
20,00	20	92	26	0,40	4	SCM780-2000Z04R-F0040HB-HP921	30656955

Disponibile su richiesta

14,00	14	73	16	0,28	4	SCM780-1400Z04R-F0028HB-HP921	30656952
18,00	18	82	22	0,36	4	SCM780-1800Z04R-F0036HB-HP921	30656954

Caratteristiche configurabili



Forma del codolo:
Forma del codolo: HA



Specifiche:
SCM780-0300Z04R-F0004[Forma del codolo]-HP921

Esempio:
SCM780-0300Z04R-F0004HA-HP921



Forma del codolo HA

Misure in mm.
Per i parametri di lavorazione consigliati, vedere la fine del capitolo.
Versioni speciali e altri rivestimenti disponibili su richiesta.

ECU-Mill-Uni-LV

Fresa a spallamento retto, versione lunga con gambo scaricato
SCM790, prodotto successivo di OptiMill-Uni (z4)

Versione:
Diametro fresa: 3,00 - 20,00 mm
Materiale da taglio: HP921
Numero di taglienti: 4
Angolo dell'elica: 36°/38,5°
Particolarità: passo differenziato

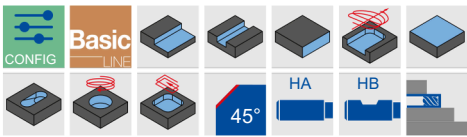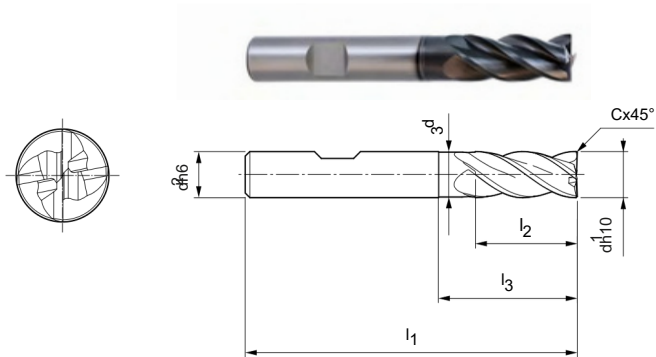

P	1	2	3	4	5	6	M	1	2	3	K	1	2	3	N	1	2	3	4	S	1	2	3	4	5	H	1	2	3
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Serie selezionata per il magazzino

Dimensioni							z	Specifiche	Codice
d1 h10	d2 h6	d3	l1	l2	l3	Cx45°			
3,00*	6	–	57	8	–	0,06	4	SCM790-0300Z04R-F0006HB-HP921	30656932
4,00*	6	–	57	11	–	0,08	4	SCM790-0400Z04R-F0008HB-HP921	30656933
5,00*	6	–	57	13	–	0,10	4	SCM790-0500Z04R-F0010HB-HP921	30656934
6,00	6	5,8	57	13	20	0,12	4	SCM790-0600Z04R-F0012HB-HP921	30656935
8,00	8	7,8	63	21	25	0,16	4	SCM790-0800Z04R-F0016HB-HP921	30656936
10,00	10	9,8	72	22	30	0,20	4	SCM790-1000Z04R-F0020HB-HP921	30656937
12,00	12	11,8	83	26	36	0,24	4	SCM790-1200Z04R-F0024HB-HP921	30656938
14,00	14	13,8	83	26	36	0,28	4	SCM790-1400Z04R-F0028HB-HP921	30656939
16,00	16	15,8	92	36	42	0,32	4	SCM790-1600Z04R-F0032HB-HP921	30656940
20,00	20	19,8	104	41	53	0,40	4	SCM790-2000Z04R-F0040HB-HP921	30656942

Disponibile su richiesta

18,00	18	17,8	92	36	42	0,36	4	SCM790-1800Z04R-F0036HB-HP921	30656941
-------	----	------	----	----	----	------	---	-------------------------------	----------

Caratteristiche configurabili



Forma del codolo:
Forma del codolo: HA



Specifiche:
SCM790-0300Z04R-F004[Forma del codolo]-HP921

Esempio:
SCM790-0300Z04R-F004HA-HP921

Forma del codolo HA

Misure in mm.
* Versione senza gambo scaricato.
Per i parametri di lavorazione consigliati, vedere la fine del capitolo.
Versioni speciali e altri rivestimenti disponibili su richiesta.